


# Industrial Monitor

## Style 649

### Unique Features of Protek Industrial Monitors

- 1 Flow turning vanes in each elbow efficiently reduce friction
- 2 Powder coating produces a tough, corrosion resistant finish
- 3 Positive friction locks with brass knob for both horizontal and vertical travel to hold desired position
- 4 Stainless steel lever for durability and easy control
- 5 Major components made from brass alloy (UNS C83600, ASTM B62) for a long-lasting service life
- 6 Optional flanges: ANSI, ASA, DIN or ISO
- 7 Double-row stainless steel ball bearings in monitor joints ensure smooth movements even when the monitor is under pressure
- 8 Compatible with Protek's diverse range of water and self-educing foam monitor nozzles for various applications

Style 649 monitor shown  
with Style 848-BC nozzle

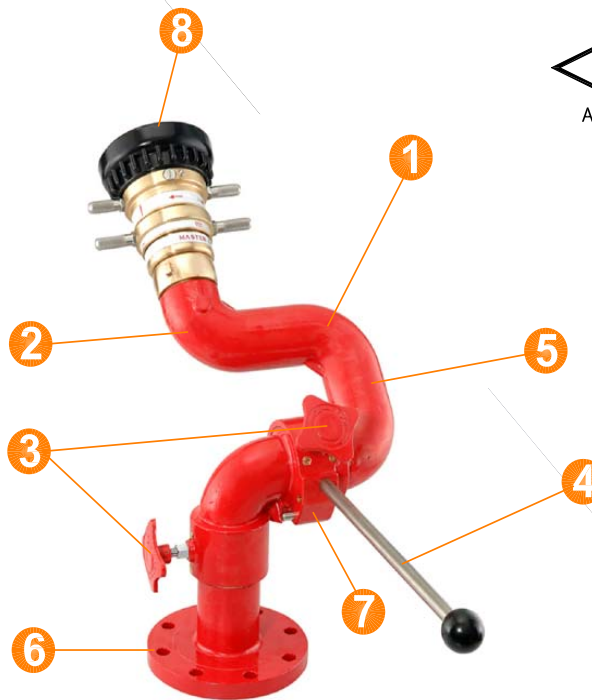

[www.protekfire.com.tw](http://www.protekfire.com.tw) ♦ [sales@protekfire.com.tw](mailto:sales@protekfire.com.tw)

[www.fireresponse.com.au](http://www.fireresponse.com.au)

Unit 13, 26 Oakdale Road Gateshead NSW 2290

Ph: 02 4944 7700

[firemail@fireresponse.com.au](mailto:firemail@fireresponse.com.au)

ABN 99 612 337 514

