



www.firerresponse.com.au

Unit 13, 26 Oakdale Road Gateshead NSW 2290

Ph: 02 4944 7700

firemail@firerresponse.com.au

ABN 99 612 337 514



PERSONAL TIC

FLIR K2™

The FLIR K2 is a rugged, reliable, and economical thermal imaging camera specially designed for firefighting applications and severe conditions. This camera displays 160 × 120 pixel thermal images that help firefighters gain additional situational awareness that is not possible with the naked eye. It features Multi-Spectral Dynamic Imaging (MSX®), an easy-to-use button, and the ability to operate in temperatures up to 500°C. The FLIR K2 Situational Awareness TIC is a small investment that pays big dividends – saving lives, protecting property, and ensuring firefighter safety.


www.flir.com/K2



COMPACT, RUGGED, AND EASY TO USE

Simple, single-button glove-friendly control; straightforward operation

- Compact and lightweight enough to carry anywhere or attach to your gear
- Water resistant (IP67) and rugged enough to withstand a 2-meter drop onto concrete
- Fully operational at temperatures up to 500°F/260°C (max. 3 minutes)

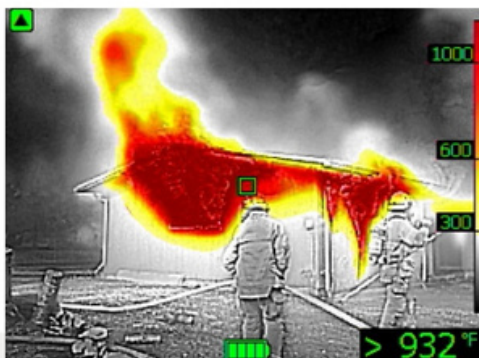

MULTIPLE IMAGE MODES

Greater visibility allows fire crews to create a better plan of attack

- Set the camera to one of seven imaging modes depending upon primary use
- MSX® image enhancement adds edge detail to scenes, helping firefighters identify structures and surroundings
- Change image modes easily using free, downloadable FLIR Tools® software



ENHANCED SITUATIONAL AWARENESS

High-quality imaging can be standard issue for every firefighter

- Displays 160 × 120 thermal pixel resolution images on a bright 3" screen
- Increases safety in low visibility environments with crisp thermal imaging
- Affordable enough to have a Situational Awareness TIC for each rear seat

SPECIFICATIONS

Thermal imaging and optical data	
IR resolution	160 × 120 (19,200 pixels)
Refresh rate	9 Hz
Thermal sensitivity/NETD	<100 mK @ 86°F (30°C)
Field of view (FOV)	47° × 35°
Focal plane array	Uncooled microbolometer, 7.5–13 μm
Start-up time	<30 sec (IR image, no GUI)
Visual camera data	
Built-in digital camera	640 × 480 (307,200 pixels)
Field of view (FOV)	73° × 61°, adapts to IR lens
Sensitivity	Minimum 10 lux
Image presentation	
Display	320 × 240 pixel, 3 in backlit LCD
Auto-range	Auto, non-selectable
Image modes (switch in FLIR Tools®)	Basic firefighting (default); Black-and-white firefighting; Fire; Search-and-rescue; Heat detection; Cold detection; Building analysis mode
Multi Spectral Dynamic Imaging (MSX®)	Yes
Measurement	
Object temperature range	-4°F to 302°F (-20°C to 150°C); 32°F to 932°F (0°C to 500°C)
Accuracy	±7.2°F (±4°C) or ±4% of reading for ambient temperature 50°F to 95°F (10°C to 35°C)
Spotmeters	1

Isotherm	Yes
Automatic heat detection	Heat-detection mode (hottest 20% of scene is colorized)
Data transfer and compatibility	
USB type	USB micro-B
Interfaces	Update from PC devices
Compatibility	Works with FLIR Tools software
General	
Operating temperature range	14°F to 131°F (-10°C to 55°C) – infinity; 185°F (85°C) – 15 minutes; 302°F (150°C) – 10 minutes; 500°F (260°C) – 3 minutes
Storage temperature range	-40°F to 158°F (-40°C to 70°C)
Battery type and voltage	Li-ion, 3.6 V rechargeable
Battery operating time	Approximately 4 hours at 77°F (25°C) and with typical use
Charging time	2.5 h to 90% capacity
Power management	Automatic shutdown and sleep mode
Encapsulation	IP 67 (IEC 60529)
Drop	6.6 ft (2 m)
Weight w/ battery	1.54 lbs (0.7 kg)
Size (L × W × H)	9.8 × 4.1 × 3.5 in (250 × 105 × 90 mm)
Tripod mount	UNC 1/4"-20
Package contents	
K2 camera, 2 batteries, battery charger, lanyard strap, power supply, printed documentation, USB cable	



www.firerresponse.com.au

Unit 13, 26 Oakdale Road Gateshead NSW 2290

Ph: 02 4944 7700

firemail@firerresponse.com.au

ABN 99 612 337 514



www.flir.com
NASDAQ: FLIR

Equipment described herein may require US Government authorization for export purposes. Diversion contrary to US law is prohibited. Imagery for illustration purposes only. Specifications are subject to change without notice. ©2019 FLIR Systems, Inc. All rights reserved.

19-0238-INS

